



EVEREXCEED AGM TECHNOLOGY

FT12V230

VALVE REGULATED

LEAD ACID BATTERY (AVR)

FOR COMMUNICATION

STANDBY POWER APPLICATIONS

12V 230AH @ 10 HR RATE to 1.80VPC

12V 264AH @ 20 HR RATE to 1.75VPC

12V 773WATTS/CELL @ 15MIN RATE to 1.67VPC

**LONG
DURATION**

**HIGH
PERFORMANCE**



Features



- ✚ Virgin Pure Lead Tin and thick positive plate technology design for maximum service float life - 15 year design life @ 20°C(68°F);
- ✚ UL Recognized component;
- ✚ Valve regulated lead acid battery (VRLA);
- ✚ Optimized high-compression Absorbed Glass Mat (AGM) materials significantly enhance performance and reliability, greater than 99% recombination efficiency;
- ✚ Advanced triple stage unique terminal sealing design to ensure leak free operation;
- ✚ Operates at a low internal pressure;
- ✚ Heavy duty M6 / M8 Female copper plated terminals provide maximum performance and easy installation, reduce maintenance and increase safety;
- ✚ Advanced lead tin low-calcium alloy, reduces grid corrosion and promotes long battery life;
- ✚ Optional: Reinforced ABS (UL 94HB) container and cover;
- ✚ Standard: Flame-retardant reinforced ABS case and cover compliant with U.L.94 V-0 with an Oxygen Limiting Index of greater than 28%;
- ✚ Designed to withstand extreme temperature degrees and performance without degradation;
- ✚ Over-sized, through the partition inter-cell welds provide low resistance connections, with minimal power loss;
- ✚ Flame arresting, low pressure safety release venting system for individual cells, recognized per U.L.924;
- ✚ Multi-cell design for ease of installation and maintenance;
- ✚ Horizontal or vertical operation.

12 VOLTS - 264 AMPERE HOUR @ 20 HOUR RATE

AH Capacity to 1.75VPC @ 20°C (68°F)


End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.75	170	180	192	202	208	226	237	242	264	266

For Mobility / Solar / Marine Telecommunication Applications



FT Range AGM VRLA

EverExceed®
power your applications

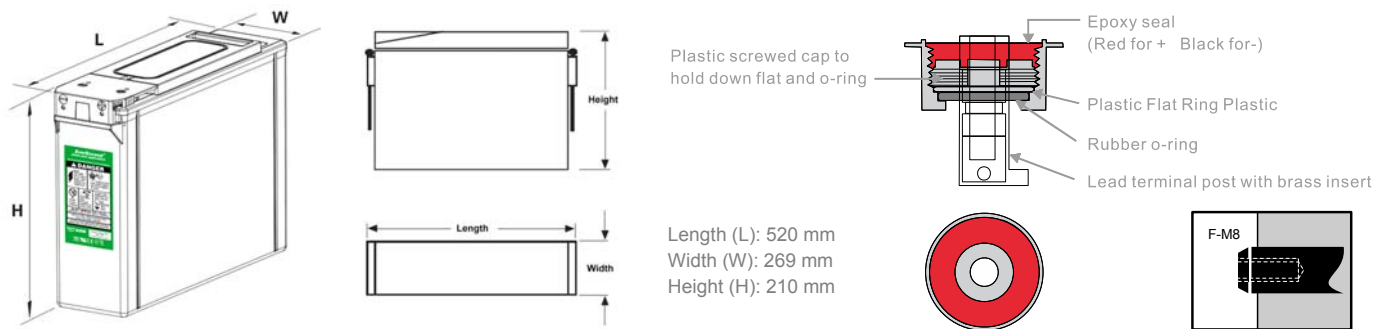

Electrical Specifications						
Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	Maximum discharge current	Short Circuit Current	Ohms Imped 60 Hz(Ω)
6	12.84	155lbs 70.0kg	SG = 1.300	1460 Amps	5900 Amps	0.0015

Capacity	735 Watts per all at the 15 minute rate to 1.75 volts per cell @ 20°C (68°F). 230 Ah @ 10 hr. rate to 1.80 volts per cell @ 20°C (68°F). 264 Ah @ 20 hr. rate to 1.75 volts per cell @ 20°C (68°F).
Applicable Operating Temperature Range	-40°C (-40°F) to +60°C (+140°F).
Ideal Operating Temperature Range	+20°C (+68°F) to +25°C (+77°F).
Floating Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F).
Recommended Maximum Charging Current Limit	0.2C20 amperes (52.8 amperes @ 100% depth of discharge) @ 20 hr. rate to 1.75VPC.
Equalization and Cycle Service Charging Voltage	14.1 to 14.4 VDC/unit Average at 25°C (77°F).
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4% P-P). Maximum current allowed = 13.2 amperes RMS (C/20) to 1.75VPC.
Self Discharge	EverExceed Deep Cycle Gel Range batteries may be stored for up to 6 months at 20°C (68°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Accessories	Inter unit connectors racks and cabinet systems are available.
Terminal: Inserted	Threaded copper alloy insert terminal
Terminal Hardware Initial Torque: Inserted Terminal	20 N-m

Constant Power Discharging Ratings - Watts Per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	199	164	116	91.5	76.1	52.5	43.8	37.9	24.9	20.5
1.80	213	168	121	95.8	79.8	54.7	45.5	38.9	25.5	21.6
1.75	220	174	123	97.7	81.4	55.6	46.4	39.6	26.1	22.0

Constant Current Discharging Ratings - Ampere per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	104	83.0	59.0	46.4	38.5	26.7	22.0	18.6	12.3	10.1
1.80	111	88.3	62.8	49.1	40.9	27.7	23.0	19.6	12.9	10.8
1.75	113	90.1	64.1	50.4	41.5	28.3	23.7	20.2	13.2	11.1

Note: Batteries to be mounted with 0.5 in (1.25 cm) spacing minimum and free air ventilation.
Specifications subject to change without notification.

