

# EXCELLENT CYCLING ABILITY

FOR  
MOBILITY  
SOLAR / PHOTOVOLTAIC  
MARINE  
TELECOMMUNICATION  
APPLICATIONS



## 12-250G / E8G250-12

GELLED VALVE REGULATED  
LEAD ACID BATTERY (GVR)  
FOR CYCLING APPLICATIONS

12V 250AH @ 20 HR RATE to 1.75VPC

12V 277AH @ 100 HR RATE to 1.75VPC

# LONG DURATION

### Innovative Features

- ☑ Exceptional energy storage capacity combined with long life - BCI Classification;
- ☑ Thick positive plate design for maximum service float life - 12 years design life @ 20°C(68°F);
- ☑ Thickness positive plate plus optimized plate alloy to anti-corrosion;
- ☑ Maintenance-free (no topping up) during the whole service life due to EverExceed GEL technology;
- ☑ Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection;
- ☑ Flame-arresting one-way pressure-relief vent for safe and long life;
- ☑ Microporous rubber and corrugated PVC SiO<sub>2</sub> separator, the special design increase the high porosity and anti-corrosion and decrease the internal resistance;
- ☑ Electrolyte in solid gel form will not stratify no equalization charge required;
- ☑ Sulfuric acid thixotropic gel, gel powder from Europe leading supplier to ensure the unique performance of gel battery;
- ☑ Increased durability and deep cycle ability for heavy duty applications;
- ☑ Fully tank formed grid Lead Calcium Tin plate ensures voltage matching between cells;
- ☑ Shelf life up to 2 years at 20°C (68°F), very low gassing due to internal gas recombination;
- ☑ Can be used in any orientation. Upright, side or end mounting recommended;
- ☑ Unique performance against high temperature;
- ☑ UL Recognized component;
- ☑ Spill-proof and leak-proof;



### 12 VOLTS - 250 AMPERE HOUR @ 20 HOUR RATE

#### AH Capacity to 1.75VPC @ 20°C (68°F)

End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	48hr	72hr	100hr
1.75	147	164	178	186	194	216	225	230	250	253	261	269	277

# Deep Cycle Gel Range VALR

**EverExceed**<sup>®</sup>  
power your applications

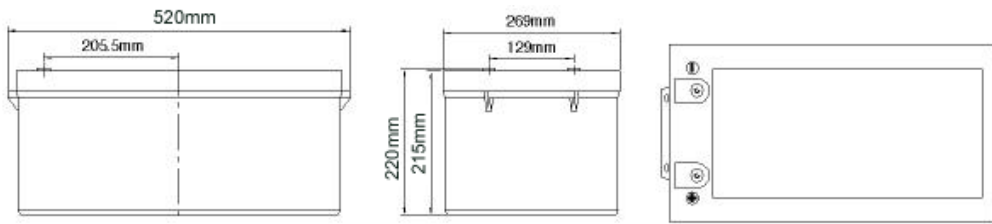

Length: 520mm    Width: 269mm    Height: 220mm

Electrical Specifications						
Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	CCA @ -18°C (0°F)	Short Circuit Current	Ohms Imped 60 Hz(Ω)
6	12.84	176lbs 80.0kg	SG = 1.300	1500 Amps	6300 Amps	0.0020

<b>Capacity</b>	250 Ah @ 20 hr. rate to 1.75 volts per cell @ 20°C (68°F). 277 Ah @ 100 hr. rate to 1.75 volts per cell @ 20°C (68°F).
<b>Applicable Operating Temperature Range</b>	-40°C (-40°F) to +70°C (158°F).
<b>Ideal Operating Temperature Range</b>	+20°C (+68°F) to +35°C (+95°F).
<b>Floating Charging Voltage</b>	13.5 to 13.8 VDC/unit Average at 25°C (77°F).
<b>Recommended Maximum Charging Current Limit</b>	0.25C20 amperes (62.5 amperes @ 100% depth of discharge) @ 20 hr. rate to 1.75VPC.
<b>Equalization and Cycle Service Charging Voltage</b>	14.1 to 14.4 VDC/unit Average at 25°C (77°F).
<b>Maximum AC Ripple (Charger)</b>	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4% P-P). Maximum current allowed = 12.5 amperes RMS (C/20) to 1.75VPC.
<b>Self Discharge</b>	EverExceed Deep Cycle Gel Range batteries may be stored for up to 24 months at 20°C (68°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
<b>Accessories</b>	Inter unit connectors racks and cabinet systems are available.
<b>Terminal: Inserted</b>	Threaded copper alloy insert terminal.
<b>Terminal Hardware Initial Torque: Inserted Terminal</b>	11 N-m

Constant Power Discharging Ratings - Watts Per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	172	150	107	84.3	70.2	49.4	40.8	34.8	22.8	19.6
1.80	182	154	112	88.9	74.0	52.0	43.2	37.0	24.2	20.6
1.75	185	157	114	90.6	75.4	52.9	44.1	37.7	24.7	20.9

Constant Current Discharging Ratings - Amperes Per Cell @ 20°C (68°F)													
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	48hr	72hr	100hr
1.85	89.7	75.5	54.5	43.0	35.6	24.9	20.5	17.5	11.4	9.8	5.11	3.53	2.63
1.80	95.2	80.2	57.9	45.6	37.8	26.3	21.9	18.6	12.2	10.3	5.30	3.65	2.72
1.75	97.5	82.1	59.3	46.7	38.7	27.0	22.5	19.1	12.5	10.6	5.44	3.74	2.77

**Note:** Batteries to be mounted with 0.39 in (1.00 cm) spacing minimum and free air ventilation.  
Specifications subject to change without notification.