

# EXCELLENT CYCLING ABILITY

FOR

SOLAR / PHOTOVOLTAIC

WIND GENERATION

INVERTER / MOBILITY

TELECOMMUNICATION

APPLICATIONS



## DP-12180

SEALED VRLA MONOBLOC AGM BATTERIES  
VALVE REGULATED LEAD ACID BATTERY  
FOR CYCLING APPLICATIONS

**12V 180AH @ 20 HR RATE to 1.75VPC**

**12V 205AH @ 100 HR RATE to 1.75VPC**

# LONG DURATION

### Innovative Features

- ☑ Thick positive plate design and high Tin alloy~12 years design life @ 20°C(68°F).
- ☑ UL Recognized component.
- ☑ Valve regulated lead acid battery (VRLA).
- ☑ High-Compression Absorbed Glass Mat technology (AGM) for greater than 99% recombination efficiency.
- ☑ Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection.
- ☑ Operates at a low internal pressure.
- ☑ Heavy duty insert copper terminals for ease of assembly, reduced maintenance and increased safety.
- ☑ Advanced lead tin calcium alloy, reduces grid corrosion and promotes long battery life.
- ☑ Standard: Reinforced ABS (UL 94HB) container and cover.  
Optional: Flame-retardant reinforced ABS container and cover compliant with U.L.94 V-0 with an Oxygen limiting Index of greater than 28%.
- ☑ Over-sized, through the partition inter-cell welds provide low resistance connections, with minimal power loss.
- ☑ Flame arresting, low pressure safety release venting system for individual cells, recognized per U.L. 924.
- ☑ Multicell design for ease of installation and maintenance.
- ☑ Horizontal or vertical operation.



#### 12 VOLTS - 180 AMPERE HOUR @ 20 HOUR RATE

#### AH Capacity to 1.75VPC @ 20°C (68°F)

End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	100hr
1.75	116	123	132	138	142	156	162	166	180	183	205

# Deep Cycle AGM Range

**EverExceed®**  
power your applications

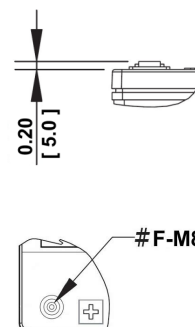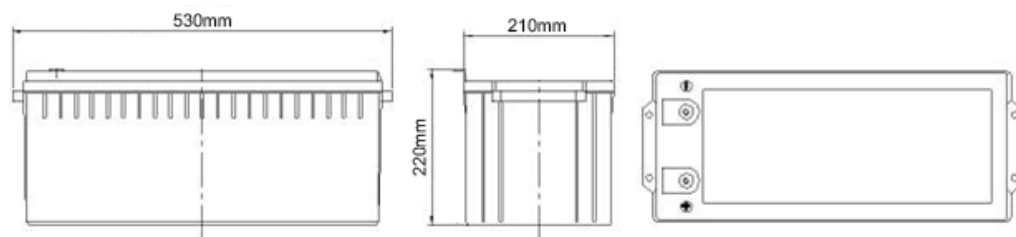

Length: 530mm Width: 210mm Height: 220mm

Electrical Specifications						
Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	Maximum Discharge Current	Short Circuit Current	Ohms Imped 60 Hz(Ω)
6	12.84	119lbs 54.0kg	SG = 1.300	1143 Amps	4700 Amps	0.0020

Capacity	180 Ah @ 20 hr. rate to 1.75 volts per cell @ 20°C (68°F). 205 Ah @ 100 hr. rate to 1.75 volts per cell @ 20°C (68°F).
Applicable Operating Temperature Range	-40°C (-40°F) to +70°C (158°F).
Ideal Operating Temperature Range	+20°C (+68°F) to +30°C (+86°F).
Floating Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F).
Recommended Maximum Charging Current Limit	0.25C20 amperes (45.0 amperes @ 100% depth of discharge) @ 20 hr. rate to 1.75VPC.
Equalization and Cycle Service Charging Voltage	14.1 to 14.4 VDC/unit Average at 25°C (77°F).
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4% P-P). Maximum current allowed = 9.00 amperes RMS (C/20) to 1.75VPC.
Self Discharge	EverExceed Deep Cycle AGM Range batteries may be stored for up to 12 months at 20°C (68°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Accessories	Inter unit connectors racks and cabinet systems are available.
Terminal: Inserted	Threaded copper alloy insert terminal.
Terminal Hardware Initial Torque: Inserted Terminal	11 N-m

Constant Power Discharging Ratings - Watts Per Cell @ 20°C (68°F)											
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	100hr
1.85	135	112	78.9	62.2	52.2	35.8	30.0	26.1	16.9	14.0	3.71
1.80	145	116	82.6	65.4	54.4	37.4	31.2	26.5	17.7	14.8	3.97
1.75	150	119	84.7	66.6	55.8	38.4	31.8	27.2	17.9	15.0	4.09

Constant Current Discharging Ratings - Amperes Per Cell @ 20°C (68°F)											
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr	100hr
1.85	70.2	56.6	40.4	31.6	26.3	18.2	15.0	12.8	8.39	6.91	1.86
1.80	75.5	60.6	42.7	33.6	27.9	18.9	15.8	13.4	8.78	7.39	1.98
1.75	77.3	61.5	43.9	34.5	28.4	19.5	16.2	13.8	9.00	7.61	2.05

**Note:** Batteries to be mounted with 0.39 in (1.00 cm) spacing minimum and free air ventilation.  
Specifications subject to change without notification.